


Stainless steel levelling feet in hygienic variant 3A Solid Vulcanized. The difference with the other variants is the material of the foot, which in this leveling foot consists of black NBR rubber that is 'Vulcanized'. This means increased rigidity and durability of the material because it is vulcanised (irreversible process for hardening).

DN	A	B	C	D	E	Article 304
M12x140	188	140	M12	48	60	7131214006070
M12x190	238	190	M12	48	60	7131219006070
M16x140	188	140	M16	48	60	7131614006070
M16x140	190	140	M16	50	80	7131614008070
M16x190	238	190	M16	48	60	7131619006070
M16x190	240	190	M16	50	80	7131619008070
M20x140	188	140	M20	48	60	7132014006070
M20x140	190	140	M20	50	80	7132014008070
M20x142	192	142	M20	50	80	7132014208070
M20x190	238	190	M20	48	60	7132019006070
M20x190	240	190	M20	50	80	7132019008070
M24x140	190	140	M24	50	80	7132414008070
M16x140	193	140	M16	53	100	7131614010070
M16x140	193	140	M16	53	100	7131614010074
M16x140	195	140	M16	55	120	7131614012070
M16x140	195	140	M16	55	120	7131614012074
M16x190	243	190	M16	53	100	7131619010070
M16x190	243	190	M16	53	100	7131619010074
M16x190	245	190	M16	55	120	7131619012070
M16x190	245	190	M16	55	120	7131619012074
M20x140	193	140	M20	53	100	7132014010070
M20x140	193	140	M20	53	100	7132014010074
M20x140	195	140	M20	55	120	7132014012070
M20x140	195	140	M20	55	120	7132014012074
M20x140	199	140	M20	59	150	7132014015070
M20x140	199	140	M20	59	150	7132014015074
M20x140	197	140	M20	29	200	7132014020074
M20x190	243	190	M20	53	100	7132019010070
M20x190	243	190	M20	53	100	7132019010074
M20x190	245	190	M20	55	120	7132019012070
M20x190	245	190	M20	55	120	7132019012074
M20x190	249	190	M20	59	150	7132019015070
M20x190	249	190	M20	59	150	7132019015074
M20x190	247	190	M20	29	200	7132019020074
M24x140	193	140	M24	53	100	7132414010070
M24x140	193	140	M24	53	100	7132414010074
M24x140	195	140	M24	55	120	7132414012070
M24x140	195	140	M24	55	120	7132414012074
M24x140	199	140	M24	59	150	7132414015070

DN	A	B	C	D	E	Article 304
M24x140	199	140	M24	59	150	7132414015074
M24x140	197	140	M24	29	200	7132414020074
M24x190	240	190	M24	50	80	7132419008070
M24x190	243	190	M24	53	100	7132419010070
M24x190	243	190	M24	53	100	7132419010074
M24x190	245	190	M24	55	120	7132419012070
M24x190	245	190	M24	55	120	7132419012074
M24x190	249	190	M24	59	150	7132419015070
M24x190	249	190	M24	59	150	7132419015074
M24x190	247	190	M24	29	200	7132419020074
M30x135	188	135	M30	53	100	7133013510070
M30x135	188	135	M30	53	100	7133013510074
M30x135	190	135	M30	55	120	7133013512070
M30x135	190	135	M30	55	120	7133013512074
M30x135	194	135	M30	59	150	7133013515070
M30x135	194	135	M30	59	150	7133013515074
M30x135	192	135	M30	29	200	7133013520074
M30x185	238	185	M30	53	100	7133018510070
M30x185	238	185	M30	53	100	7133018510074
M30x185	240	185	M30	55	120	7133018512070
M30x185	240	185	M30	55	120	7133018512074
M30x185	244	185	M30	59	150	7133018515070
M30x185	244	185	M30	59	150	7133018515074
M30x185	242	185	M30	29	200	7133018520074
M30x235	290	235	M30	55	120	7133023512070
M30x235	290	235	M30	55	120	7133023512074
M30x235	294	235	M30	59	150	7133023515070
M30x235	294	235	M30	59	150	7133023515074
M30x235	292	235	M30	29	200	7133023520074
M36x135	190	135	M36	55	120	7133613512070
M36x135	190	135	M36	55	120	7133613512074
M36x135	194	135	M36	59	150	7133613515070
M36x135	194	135	M36	59	150	7133613515074
M36x135	192	135	M36	29	200	7133613520074
M36x185	240	185	M36	55	120	7133618512070
M36x185	240	185	M36	55	120	7133618512074
M36x185	244	185	M36	59	150	7133618515070
M36x185	244	185	M36	59	150	7133618515074
M36x185	242	185	M36	29	200	7133618520074
M36x235	290	235	M36	55	120	7133623512070
M36x235	290	235	M36	55	120	7133623512074

DN	A	B	C	D	E	Article 304
M36x235	294	235	M36	59	150	7133623515070
M36x235	294	235	M36	59	150	7133623515074
M36x235	292	235	M36	29	200	7133623520074

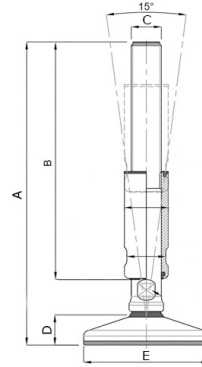

Article properties

Type	Levelling Feet Hygienic
Certification	3A
Field of application	Food processing, Chemical, Pharmaceutical Industry
Material thread	1.4301 (304)
Material base	1.4301 (304) with NBR (Vulcanized)