


DN	A	B	C	D	E	Article 316
12.0	12.0	48.0	37.0	20.0	14.0	R27116198896
15.0	15.0	53.0	41.0	21.0	18.0	R27116190349
18.0	18.0	51.0	45.0	25.0	22.0	R27116190351
22.0	22.0	60.0	51.0	30.0	27.0	R27116190360
28.0	28.0	66.0	60.0	37.0	34.0	R27116190371
35.0	35.0	76.0	71.0	45.0	42.0	R27116190382
42.0	42.0	93.0	86.0	56.0	51.0	R27116190393
54.0	54.0	111.0	105.0	70.0	65.0	R27116190404
76.1	76.1	165.0	150.0	95.0	91.0	R27116230037
88.9	88.9	190.0	175.0	112.0	107.0	R27116230048
108.0	108.0	238.0	216.0	139.0	130.0	R27116230059

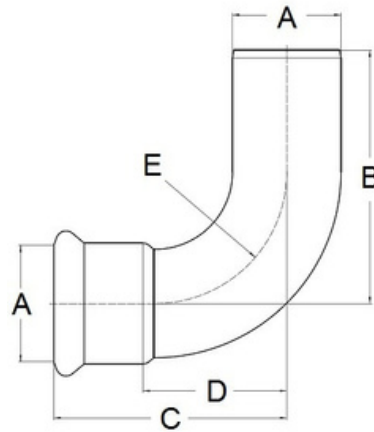

Article properties

Producer	Aalberts IPS (VSH)
According to	EN 10312
Pressing contour	M-profile
Type	90° Elbow
Connections	Press/Male
Field of application	Industry
Process area	Drinking water, process water, heating, cooling, steam, compressed air, solar and vacuum
Material	1.4404 (316L)
Maximum workload	16 bar (Higher pressure is possible, depends on use and size)
Material gasket	EPDM (Leak Before Pressed)
Color gasket	Black
Temperature	-35°C / +135°C
Certification	KIWA, DVGW, TA-Luft and more